


02/22/99



J-640 U.S. PTO

A

PATENT

Docket No. 1232-4511

Express Mail Label No. EE6451432350

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY APPLICATION AND APPLICATION FEE TRANSMITTAL (1.53(b))

ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Named Inventor(s) and

Address(es): Hideo KAWAHARA, 10-7, Honcho 3-chome, Hatogaya-shi, Saitama-ken, Japan; and
Hitoshi YASUDA, 20-5-405, Takashimadaira 9-chome, Itabashi-ku, Tokyo, Japan

For: METHOD AND APPARATUS FOR IMAGE SENSING

Enclosed are:

☒ 81 page(s) of specification, 1 page(s) of Abstract, 26 Page(s) of claims☒ 22 sheets of drawing ☒ formal ☐ informal☐ Page(s) of Declaration and Power of Attorney

- ☐ Unsigned
☐ Newly Executed
☐ Copy from prior application

☐ Deletion of inventors including Signed Statement under 37 C.F.R. § 1.63(d)(2)☒ Incorporation by Reference: The entire disclosure of the priority application(s) identified below, is considered as being part of the disclosure of the accompanying application and is incorporated herein by reference.☐ Microfiche Computer Program (Appendix)☐ page(s) of Sequence Listing

- ☐ computer readable disk containing Sequence Listing
☐ Statement under 37 C.F.R. § 1.821(f) that computer and paper copies of the Sequence Listing are the same

☒ Claim for Priority Japanese Patent Application Nos 10-057330 filed 2/24/98; and 10-092664 filed 3/20/98☐ Certified copy of Priority Document(s)

J-640 U.S. PTO

09/255549

02/22/99

09/255549-000000

- ☐ English translation documents
- ☐ Information Disclosure Statement
- ☐ Copy of cited references w/ English Abstracts
- ☐ Copy of PTO-1449 filed in parent application serial No.
- ☐ Preliminary Amendment
- ☒ Return receipt postcard (MPEP 503)
- ☐ Assignment Papers (assignment cover sheet and assignment documents)
- ☐ A check in the amount of \$40.00 for recording the Assignment.
- ☐ Assignment papers filed in parent application Serial No.
- ☐ Certification of chain of title pursuant to 37 C.F.R. § 3.73(b).
- ☐ This is a ☐ continuation ☐ divisional ☐ continuation-in-part (C-I-P) of prior application serial no.
- ☐ Cancel in this application original claims of the parent application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☐ A preliminary Amendment is enclosed. (Claims added by this Amendment have been properly numbered consecutively beginning with the number following the highest numbered original claim in the prior application.
- ☐ The status of the parent application is as follows:
- ☐ A Petition For Extension of Time and a Fee therefor has been or is being filed in the parent application to extend the term for action in the parent application until .
- ☐ A copy of the Petition for Extension of Time in the co-pending parent application is attached.
- ☐ No Petition For Extension of Time and Fee therefor are necessary in the co-pending parent application.
- ☐ Please abandon the parent application at a time while the parent application is pending or at a time when the petition for extension of time in that application is granted and while this application is pending has been granted a filing date, so as to make this application co-pending.
- ☐ Transfer the drawing(s) from the patent application to this application.
- ☐ Amend the specification by inserting before the first line the sentence:
This is a ☐ continuation ☐ divisional ☐ continuation-in-part of co-pending application Serial No. filed .

I. CALCULATION OF APPLICATION FEE (For Other Than A Small Entity)

					Basic Fee
	Number Filed		Number Extra	Rate	\$ 760.00
Total Claims	41	-20=	20	x\$18.00	\$ 378.00
Independent Claims	12	-3=	9	x78.00	\$ 702.00
Multiple Dependent Claims					
	[] yes		Additional Fee =	\$260.00	\$
	[X] no		Add'l Fee =	NONE	

Total: \$1,840.00

[] A statement claiming small entity status is attached or has been filed in the above-identified parent application and its benefit under 37 C.F.R. § 1.28(a) is hereby claimed. Reduced fees under 37 C.F.R. § 1.9(F) (50% of total) paid herewith \$ _____.


[X] A check in the amount of \$1,840.00 for payment of the application filing fees is attached.

[] Charge Fee(s) to Deposit Account No. 13-4500. Order No. _____. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

[X] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required for filing this application, or credit any overpayment to Deposit Account No. 13-4500, Order No. 1232-4511. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

Respectfully submitted,

MORGAN & FINNEGAN, L.L.P.

By: 
 Michael M. Murray
 Registration No 32,537

Dated: February 22, 1999

CORRESPONDENCE ADDRESS:

MORGAN & FINNEGAN, L.L.P.
 345 Park Avenue
 New York, New York 10154
 (212) 758-4800
 (212) 751-6849 Facsimile

TITLE OF THE INVENTION

METHOD AND APPARATUS FOR IMAGE SENSING

5

BACKGROUND OF THE INVENTION

62220-615260

The present invention relates to an image sensing apparatus comprising an electronic anti-vibration system which performs vibration correction by electrically
10 extracting a sensed image based on vibration data of the image sensing apparatus main body. Particularly, the present invention relates to an image sensing method and apparatus capable of sensing a moving image and a still image, and a storage medium storing control programs for
15 controlling the image sensing apparatus.

Conventional image sensing apparatuses such as a video camera or the like have achieved automatic functions and multi-functions in various aspects, e.g., automatic exposure (AE), automatic focus (AF) and so
20 forth. By virtue of this, high quality image sensing is possible.

Furthermore, as the sizes of image sensing apparatuses become smaller and magnifications of optical systems become higher, vibration of the image sensing
25 apparatus causes deteriorated sensed image quality. To compensate for such influence of vibration of the image

0025549-002269
602220-6455260

sensing apparatus, various image sensing apparatuses having a function for correcting vibration have been proposed.

Fig. 1 is a block diagram showing a construction of a conventional image sensing apparatus having a vibration correction function.

The image sensing apparatus having the vibration correction function shown in Fig. 1 comprises an image sensing unit 401, a vibration correction section 402, a signal processor 403, a recording section 404, a vibration detector 405, a DC cut filter 406, an amplifier 407, a correction variable calculator 408, a read-out controller 409, and a timing generator 410.

The image sensing unit 401 comprises a lens 401a, and an image sensing device 401b such as a CCD or the like.

The vibration correction section 402 is provided to correct image signals, obtained by the image sensing device 401b, in order to reduce vibration components of a moving image influenced by unsteady hands or the like. The vibration correction section 402 comprises a first delay section 402a serving as delay means for one pixel, a first adder 402b, a second delay section 402c serving as delay means for one image line, and a second adder 402d.

The signal processor 403 converts electric signals,

where vibration components are reduced by the vibration correction section 402, to standard video signals such as NTSC signals or the like. The recorder 404, comprising a video tape recorder or the like, records the standard video signals converted by the signal processor 403 as image signals.

The vibration detector 405 comprises an angular velocity sensor such as a vibration gyro sensor or the like and is installed in the image sensing apparatus main body.

The DC cut filter 406 cuts off the DC components of the angular velocity signal, outputted by the vibration detector 405, and passes AC components only, i.e., vibration components. The DC cut filter 406 may employ a high-pass filter (hereinafter referred to as HPF) for cutting off signals of a predetermined band.

The amplifier 407 amplifies the angular velocity signal outputted by the DC cut filter 406 to an appropriate level.

The correction variable calculator 408 comprises, e.g., a microcomputer or the like, which includes an A/D converter 408a, high-pass filter (HPF) 408b, integrator 408c, and pan/tilt determination section 408d.

The A/D converter 408a converts the angular velocity signal outputted by the amplifier 407 to digital signal.

The high-pass filter 408b, having a variable cut-off frequency, cuts off low frequency components of the digital signal outputted by the A/D converter 408a.

The integrator 408c outputs an angle displacement
5 signal by integrating the signals (angular velocity signal) outputted by the high-pass filter 408b, and has the function to vary characteristics in an arbitrary frequency band.

The pan/tilt determination section 408d determines
10 panning or tilting based on the angular velocity signal, the angular velocity signal outputted by the integrator 408c, and an integrated signal, i.e., angle displacement signal, on which integration process has been performed on the angular velocity signal. The pan/tilt
15 determination section 408d performs panning control, which will be described later, in accordance with the levels of the angular velocity signal and angle displacement signal.

The angle displacement signal obtained by the
20 correction variable calculator 408 serves as a correction target value in the control described later.

The read-out controller 409 shifts a read-out
start position of the image sensing device 401b in
accordance with the vibration correction target value
25 signal, and controls operation timing of the first delay 402a and the second delay 402c as well as an addition

ratio of the first adder 402b and the second adder 402d.

The timing generator 410 generates driving pulses for the image sensing device 401b, the first delay 402a, and the second delay 402c, based on the control data of
5 the read-out controller 409. Driving pulses are generated for the image sensing device 401b according to the storage and read operation of the image sensing device 401b. For the first delay 402a and the second delay 402c, driving pulses which serve as a reference
10 for delaying operation, and whose phases are coherent with the driving pulses of the image sensing device 401b, are generated.

The vibration correction comprises the vibration detector 405, DC cut filter 406, amplifier 407,
15 correction variable calculator 408, read-out controller 409, and timing generator 410.

Next, operation of the pan/tilt determination section 408d of the correction variable calculator 408 will be described in detail.

20 The pan/tilt determination section 408d determines an angular velocity signal from the A/D converter 408a and an angle displacement signal from the integrator 408c. If the angle displacement signal, which is obtained by integrating the angular velocity signal, is
25 larger than the predetermined threshold value, the section 408d determines that panning/tilting operation

408. Next in step S502, the high-pass filter 408b operates using the cut-off frequency value prepared in the previous step. Then in step S503, the integrator 408c executes an integration calculation using the time
5 constant value prepared in the previous step. In step S504, the integration result obtained in step S503, i.e., an angle displacement signal, is converted from a digital value to an analogue value then outputted.

In step S505, it is determined whether or not the
10 angular velocity signal is equal to or larger than a predetermined threshold value. If the angular velocity signal is equal to or larger than the predetermined threshold value, determination is made that a panning/tilting operation is being performed. Then in
15 step S506, the cut-off frequency value f_c used for the operation of the high-pass filter 408b is increased from the current value so that the signal in low frequency bands is attenuated in power. Next in step S507, the time constant value used in the integration is reduced
20 from the current value by a predetermined value so that the angle displacement output becomes close to the reference value. Then, the control operation ends.

Meanwhile, if the angular velocity signal is not equal to or larger than the predetermined threshold
25 value in step S505, it is determined in step S508 whether or not the integrated value is equal to or

larger than a predetermined threshold value. If the integrated value is equal to or larger than the predetermined threshold value, determination is made that panning or tilting operation is being performed, and the control proceeds to step S506. Meanwhile, if the integrated value is not equal to or larger than the predetermined threshold value in step S508, determination is made that the camera is in a normal control state or panning/tilting operation has been completed. Then, the control proceeds to step S509.

In step S509, the cut-off frequency value used in operation of the high-pass filter 408b is reduced from the current value by a predetermined value so that the signal power in low frequency signals is more decreased. Next in step S510, the time constant value used in integration is increased from the current value by a predetermined value so that the integration are more effective. Then, the control operation ends.

By the above described control, the overflow of integration value exceeding a correction target value is prevented. As a result, the correction target value is kept stationary, and a stable anti-vibration control is achieved.

Next, the correction means in the above-described conventional example will be briefly described with reference to Fig. 3.

Referring to Fig. 3, reference numeral 601 denotes an entire image sensing area of the image sensing device 401b; 602, an extraction frame set in the entire image sensing area 601, where an image signal is actually
5 converted to standard video signals and outputted; and 603, an object sensed by the image sensing device.

Standard video signal in this stage is seen as an image indicated as reference numeral 604. More specifically, reference numeral 604 denotes an image
10 area on a monitor where the video signal is reproduced, and 603' denotes the object reproduced in the image area 604 of the monitor. By extracting an image signal from a sensed image as will be described later, the periphery is removed from the entire image sensing area 601 and
15 the remaining portion, that is an extracted image is outputted as standard video signals. By this, the image area 604 is reproduced on the monitor.

Fig. 3 shows a case where an operator, who performs image sensing of the object 603, shifts the
20 image sensing apparatus in a lower left direction indicated by arrows 605, 605', and 605".

In this state, if an image is extracted by using an extraction frame 602' which corresponds to the extraction frame 602, the obtained video signal would
25 represent the object 603, which is shifted by the amount of vector indicated by the arrow 606. It is possible to

obtain the image 604 if the extraction position is corrected and moved from the extraction frame 602' to the extraction frame 602", using an image displacement 607 obtained based on a vibration amount of the image sensing apparatus, i.e., vibration correction target value. By employing such principle, image vibration correction is realized.

Next, extraction of an image sensing area for correction will be described with reference to Fig. 4.

In Fig. 4, reference numeral 701 denotes the entire image sensing device; and 702, pixels constructing the entire image sensing device 701, each serving as a photoelectric converter. Based on electric driving pulses generated by a timing generator (not shown), charge storage and read-out controls are performed pixel by pixel. Reference numerals 703 and 704 are extraction frames similar to the extraction frame 602 shown in Fig. 3. This will be explained for a case where video signals are extracted with, e.g., the extraction frame 703.

First, starting from the pixel "S", photoelectrically converted charges are read in the sequence of the arrow 706. The reading operation starts in concurrence with the synchronization period of output video signals. During the synchronization period, reading is performed at a faster transfer rate than the

normal reading rate until the reading-out reaches the pixel preceding the pixel "A" by one pixel.

After the synchronization period, charges for a real image period are read starting from the pixel "A" to the pixel "F" at the normal reading rate, as a line of image data in video signals.

During the horizontal synchronization period, charges of pixels are read from the pixel "F" to the pixel before the pixel "G" at a faster transfer rate than the normal reading rate, preparing for reading the next image period. Starting from the pixel "G", reading is performed in a similar manner to the reading from the pixel "A" to the pixel "F".

By controlling the reading operation as described above, for instance, the central part of the image sensing device 401b can be selectively extracted from the entire image sensing area 601 of the image sensing device 401b, and video signals can be obtained.

Described next with reference to Fig. 4 is moving the extraction position, necessary in a case where the image sensing surface is shifted due to vibration on the image sensing apparatus as described in Fig. 3.

In a case where the movement of the object (vibration of the image sensing apparatus), which is equivalent to the arrow 705, is detected on the image sensing device 401b, the extraction frame 703 is changed

to the extraction frame 704 so that an image without any object movement is obtained.

In order to change the extraction position, the aforementioned read-out start position is changed from the pixel "A" to the pixel "B". By this change, it is possible to selectively extract a partial image from the entire image sensing area 601 of the image sensing device 401b, similar to the case where reading starts from the pixel "A".

More specifically, photoelectrically converted charges are read from the pixel "S" in the sequence of the arrow 706, as similar to the case of reading the extraction frame 703. The reading operation starts in concurrence with the synchronization period of output video signals. During the synchronization period, reading is performed at a faster transfer rate than the normal reading rate until the reading reaches the pixel one-pixel prior to the pixel "B". Then, in the real image period, reading starts from the pixel "B".

As described above, a partial image sensing area, which is the periphery of the image sensing device 401b, is read in advance for the amount corresponding to vibration correction data during the synchronization signal period which does not appear in the real image period, and the part of the image sensing device 401b is selectively read out based on the vibration data. By

002220" 6455260

this, it is possible to obtain video signals from which displacement caused by vibration on the image sensing apparatus is removed.

Next, pixel shifting operation by the first delay 402a, second delay 402c, first adder 402b, and second adder 402d will be described in detail with reference to Fig. 5.

Fig. 5 is a block diagram showing a construction of an image sensing apparatus for performing finer image correction by extracting an image from the image sensing device 401b. Components shown in Fig. 5, which are identical to that of the above-described conventional example in Fig. 1, have the same reference numerals.

Referring to Fig. 5, the first adder 402b comprises a first multiplier 801, a second multiplier 802, an adder 803, and addition controller 804. The second adder 402d comprises a first multiplier 805, a second multiplier 806, an adder 807, and addition controller 808.

The image extraction, as described with reference to Fig. 4 can only be performed in each unit pixel 702 of the image sensing device 401b. Therefore, the correction could not be made for a shift less than one pixel pitch. Therefore, the first delay 402a, second delay 402c, first adder 402b, and second adder 402d perform a fine pixel shifting which accompanies a

correction calculation for an amount less than one pixel unit.

- Referring to Fig. 5, reference numeral 809 denotes an input terminal for inputting a sensed image signal
- 5 obtained by the image sensing device 401b. While the sensed image signal is inputted to the second multiplier 802 of the first adder 402b, the signal is inputted to the first multiplier 801 through the first delay 402a constructed by a CCD or the like. After the first
- 10 multiplier 801 and the second multiplier 802 multiply the respective image signal by a predetermined multiplier, addition is executed by the adder 803. As a result, a horizontal pixel-shifting correction has been performed on the sensed image signal.
- 15 The sensed image signal, on which horizontal pixel-shifting correction has been performed, is inputted to the second multiplier 806 of the second adder 402d, and to the first multiplier 805 through the second delay 402c, which is constructed by a CCD or the
- 20 like. The first multiplier 805 and the second multiplier 806 multiply the signals by predetermined multipliers. The adder 807 adds the outputs of the multipliers 805 and 806. Thus, the sensed image signal on which horizontal and vertical pixel-shifting correction has
- 25 been performed is obtained. The image signals are encoded to video signals by the signal processor 403 in

the next step.

0925549.022299
The read-out controller 409 controls the timing of driving pulses generated by the timing generator 410 for performing image extraction control of the image sensing device 401b based on the correction target value signal which corresponds to vibration of the image sensing apparatus, which is generated by the correction variable calculator 408 shown in Fig. 1. Meanwhile, the read-out controller 409 controls the addition controller 804 of the first adder 402b and the addition controller 808 of the second adder 402d so as to perform addition operation at an appropriate addition ratio.

This addition operation will now be described in detail with reference to Figs. 6A, 6B, 7A and 7B.

15 Figs. 6A and 6B are explanatory views showing the process of the first delay 402a and the first adder 402b in unit of the pixels 702 of the image sensing device 401b. The pixels 702 of the image sensing device 401b are arranged in a regular order in the vertical and
20 horizontal directions on the surface of the image sensing device 401b as shown in Fig. 4. Figs. 6A and 6B only show the pixels arranged in the horizontal direction for explanatory purpose.

First, addition operation performed in pixel units shown in Fig. 6A is described.

A horizontal center position of the n-th pixel of

0025549.022290

the pixels 702 of the image sensing device 401b is referred to as a horizontal pixel center 901. Similarly, a horizontal center position of the (n+1)th pixel of the pixels 702 is referred to as a horizontal pixel center 902. Fig. 6A graphically shows a method of calculating an imaginary center of the n-th pixel and the (n+1)th pixel. The n-th pixel value which is multiplied by 1/2, denoted by numeral 903, the (n+1)th pixel value which is multiplied by 1/2, denoted by 904, are added, thereby obtaining a pixel value at the imaginary center 905 of the n-th pixel and (n+1)th pixel. Similarly, a value in which the (n+1)th pixel is multiplied by 1/2 is added to a value in which the (n+2)th pixel is multiplied by 1/2, thereby obtaining a pixel value at the imaginary center of the (n+1)th pixel and the (n+2)th pixel.

Next, another addition operation shown in Fig. 6B will be described. Fig. 6B adopts a different addition ratio from that of Fig. 6A, showing a case of executing an addition with a ratio of 7/10 to 3/10.

In Fig. 6B, as similar to Fig. 6A, the horizontal center position of the n-th pixel of the pixels 702 of the image sensing device 401b is defined as a horizontal pixel center 901, and the horizontal center position of the (n+1)th pixel of the pixels 702 of the image sensing device 401b is defined as a horizontal pixel center 902. In order to obtain an image having 7/10 of the n-th

0925549-02299

pixel value and $3/10$ of the $(n+1)$ th pixel value, a pixel value 903' in which the n -th pixel is multiplied by $7/10$ is added to a value 904' in which the $(n+1)$ th pixel is multiplied by $3/10$, thereby obtaining an image 905'

- 5 having $7/10$ of the n -th pixel and $3/10$ of the $(n+1)$ th pixel. Similarly, by adding a value in which the $(n+1)$ th pixel is multiplied by $7/10$ to a value in which the $(n+2)$ th pixel is multiplied by $3/10$, it is possible to obtain an pixel having $7/10$ of the $(n+1)$ th pixel and
- 10 $3/10$ of the $(n+2)$ th pixel.

- As described above, by adjusting the addition ratio of adding the n -th pixel and $(n+1)$ th pixel, it is possible to obtain pixel data for an arbitrary position of a pixel in the horizontal direction. Note that
- 15 assuming that an n -th pixel value is generally multiplied by k , the addition ratio is obtained by multiplying an $(n+1)$ -th pixel value by $(1 - K)$ (where, $0 \leq K \leq 1$). Where the multiplication ratio is set to $1:0$ or $0:1$, addition is not performed. Then, the normal
- 20 read-out operation is performed.

Figs. 7A and 7B are explanatory views showing the process of the second delay 402c and the second adder 402d in the horizontal line units of the image sensing device 401b.

- 25 First, addition operation performed in horizontal line units shown in Fig. 7A will be described. The

horizontal line is constructed by a horizontal array of pixels of the image sensing device 401b. Vertical center position of the n-th line is referred to as a vertical pixel center 1001. Similarly, the vertical center
5 position of the (n+1)th line is referred to as a vertical pixel center 1002.

Fig. 7A graphically shows a method of calculating a pixel value at the center positioned between the n-th line and the (n+1)th line. A value 1003 in which the n-
10 th line is multiplied by 1/2 is added to a value 1004 in which the (n+1)th line is multiplied by 1/2, thereby obtaining a line 1005. Similarly, a value in which the (n+1)th line is multiplied by 1/2 is added to a value in which the (n+2)th line is multiplied by 1/2, thereby
15 obtaining the center image of the (n+1)th line and (n+2)th line.

Next, addition operation performed in horizontal line units shown in Fig. 7B will be described. Fig. 7B adopts a different addition ratio from that of Fig. 7A,
20 showing a case of executing addition with a ratio of 7/10 to 3/10.

In Fig. 7B, similar to Fig. 7A, the vertical center position of the n-th line of the pixels 702 of the image sensing device 401b is referred to as a
25 vertical pixel center 1001, and the vertical center position of the (n+1)th line is referred to as the

10 In the electronic anti-vibration method, the
number of pixels transferred is controlled. In a case of
employing an image sensing device reading vertically
neighboring pixels simultaneously, the pixel area where
signals are normally transferred is shifted at two pixel
15 pitch. This limits a resolving power in anti-vibration.

For a method of improving the resolving power in anti-vibration, the method disclosed in Japanese Patent Application Laid-Open No. 3-132173 is known. According to this method, vertically neighboring two pixels which are read simultaneously by an image sensing device are shifted at one pixel pitch. Since pixels are shifted at one pixel pitch within an image area where signals are normally transferred, smooth pixel movement is achieved.

For instance, in a case of reading pixels, the
25 conventional art reads pixel data at two pixel pitch as
shown in Fig. 8A. When shifting read-out data, the

conventional apparatus, instead of shifting pixels at two pixel pitch as shown in Fig. 8B, shifts image data at one pixel pitch, as shown in Fig. 8C. By this, a pixel area normally transferred can be shifted at one
5 pixel pitch. In this, regard, since the pixel combinations are different, color process has to be changed later to perform color processing according to the combination of pixels.

Note that in Figs. 8A, 8B and 8C, Y denotes an
10 yellow color filter; C, a cyan color filter; M, a magenta color filter; and G, a green color filter,

Meanwhile, there is a pixel shifting technique available today in which image signals of the vertically neighboring two pixels are added in a predetermined
15 ratio, and an image is shifted by changing the ratio, thereby improving a resolving power in anti-vibration. Herein, pixel shifting will be described with reference to Fig. 9.

Referring to Fig. 9, first, an image signal for
20 one horizontal scan period (H) is stored in 1-H delay memory 1701. A first multiplier 1702 multiplies currently inputted image signal by K_v . A second multiplier 1703 multiplies the outputs of the 1-H delay memory 1701 by $(1-K_v)$. These multiplied values are added
25 by an adder 1704. By this, when K_v is 1, currently inputted image signal is outputted. When K_v is $1/2$, an

intermediate image signal between the currently inputted image signal and the signal in the 1-H delay memory 1701 is outputted. When K_v is 0, an image signal which is 1H prior to what is stored in the 1-H delay memory 1701 is outputted. By virtue of this, it is possible to shift positions of image signals. If the addition ratio is adjusted in small increments, smaller vibration can be accommodated.

However, in the above-described conventional example in Fig. 9, if anti-vibration operation is performed by shifting a pixel area where signals are normally transferred at one pixel pitch, the resolving power is not high enough to perform anti-vibration. As a result, very small vibration remains, or excessive vibration is caused on the contrary. Moreover, performing anti-vibration by pixel shifting causes a problem of "resolution unevenness" and flickers on a screen. Herein, the "resolution unevenness" will be described.

Since pixel shifting is performed by adding image signals of the vertically neighboring two pixels as described above, the resolution is deteriorated. Shown in Fig. 10 is a graph showing deterioration of resolution. The ordinate in Fig. 10 indicates an image position, and the abscissa indicates resolution. Reference numerals 1801 to 1805 denote image signals

respectively.

As can be seen from Fig. 10, the highest resolution is achieved when pixel shifting is not performed. The resolution falls to the lowest level when
5 pixels are shifted to an intermediate position of two pixels. Therefore, if pixel shifting to an arbitrary position is performed in anti-vibration control, resolution changes one after another, causing flickers on a screen. This is called "resolution unevenness."
10 The occurrence of the resolution unevenness is the second problem to be solved in the conventional art.

SUMMARY OF THE INVENTION

15 The present invention is made in consideration of the above situation, and a first object of the present invention is to provide an image sensing method and apparatus capable of performing vibration correction similar to the conventional example when sensing a
20 moving image, and obtaining a sensed image with no image deterioration when sensing a still image, so as to solve the above-described first problem.

A second object of the present invention is to provide an image sensing method and an apparatus capable
25 of eliminating the resolution unevenness while securing a resolving power necessary for anti-vibration, so as to solve the above-described second problem.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate
5 the same or similar parts throughout the figures thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated
10 in and constitute a part of the specification, illustrate embodiments of the invention, and together with the description, serve to explain the principles of the invention.

Fig. 1 is a block diagram showing a construction
15 of a conventional image sensing apparatus;

Fig. 2 is a flowchart showing operation steps of panning control performed by the conventional image sensing apparatus;

Fig. 3 is an explanatory view for briefly
20 explaining vibration correction means of the conventional image sensing apparatus;

Fig. 4 is an explanatory view for explaining extraction of a stored image by vibration correction means of the conventional image sensing apparatus;

Fig. 5 is a block diagram for explaining pixel
25 shifting in the conventional image sensing apparatus;

Figs. 6A and 6B are explanatory views explaining

horizontal pixel shifting in the conventional image sensing apparatus;

Figs. 7A and 7B are explanatory views explaining vertical pixel shifting in the conventional image sensing apparatus;

Figs. 8A to 8C are explanatory views for explaining brief operation of vibration correction means in the conventional image sensing apparatus;

Fig. 9 is a block diagram showing a construction of a section performing pixel shifting in the conventional image sensing apparatus;

Fig. 10 is a graph showing relationship between an image position upon pixel shifting and resolution, in the conventional image sensing apparatus;

Fig. 11 is a block diagram showing a construction of an image sensing apparatus according to a first embodiment of the present invention;

Fig. 12 is a flowchart showing operation steps of pixel shifting control performed by the image sensing apparatus according to the first embodiment of the present invention;

Fig. 13 is a block diagram showing a construction of an image sensing apparatus according to a modified example of the first embodiment;

Fig. 14 is a block diagram showing a construction of an image sensing apparatus according to a second

embodiment of the present invention;

Figs. 15A and 15B are explanatory views for explaining an image area extracted by electronic anti-vibration control in the image sensing apparatus

5 according to the second embodiment;

Fig. 16 is a flowchart showing operation flow of the image sensing apparatus according to the second embodiment;

Fig. 17 is a flowchart showing operation flow of
10 the image sensing apparatus according to the second embodiment;

Fig. 18 illustrates a position (H_0, V_0) where an image extraction (image shifting) is started with respect to the position (H_c, V_c) without image shifting;

15 Fig. 19 illustrates how interpolated pixels are generated from image signals;

Fig. 20 is a graph for explaining a process of regenerating correction variable data in the image sensing apparatus according to the second embodiment;

20 Fig. 21 illustrates how interpolated pixels are quantized so that they are equally spaced; and

Fig. 22 illustrates how interpolated pixels are generated where a resolving power is raised to three times.

25

DETAILED DESCRIPTION OF THE INVENTION

Preferred embodiments of the present invention will be described in detail in accordance with the accompanying drawings.

5 <First Embodiment>

First, the first embodiment is described with reference to Figs. 11 and 12.

Fig. 11 is a block diagram showing a construction
10 of an image sensing apparatus according to the first embodiment. Components shown in Fig. 11, which are identical to that of the above-described conventional example in Fig. 1, have the same reference numerals.

Fig. 11 differs from Fig. 1 by having an image
15 sensing mode switch 411 in addition to the construction shown in Fig. 1. The image sensing mode switch 411 allows users to switch the record mode of the recording section 404, between a moving image recording mode and a still image recording mode. The recording section 404
20 employs a record format corresponding to the selected image sensing mode, depending on a recording medium.

In the above-described conventional example, the read-out controller 409 respectively controls the timing generator 410 and the first and second adders 402b and
25 402d based on vibration correction target value data obtained by the correction variable calculator 408. However, in the present embodiment, the read-out

controller 409 changes operation of the timing generator 410 and the first and second adders 402b and 402d in accordance with the state of the image sensing mode switch 411.

- 5 The operation of the image sensing mode switch 411 is now described with reference to the flowchart in Fig. 12.

- First in step S201, a vibration correction target value is obtained by the correction variable calculator
- 10 408 based on vibration data obtained by the vibration detector 405. The read-out controller 409 controls read-out operation of the image sensing device 401b so as to perform an anti-vibration correction according to the obtained vibration correction target value. Next in step
- 15 S202, it is determined whether the image sensing mode switch 411 is set in the moving image sensing mode or in the still image sensing mode. In a case where it is set in the still image sensing mode, it is determined in step S203 whether or not the record mode of the
- 20 recording section 404 is ready for a still image, i.e., set in the still image recording mode. If the recording section 404 is set in the still image recording mode, the process proceeds directly to step S204, while if the recording section 404 is set in the moving image
- 25 recording mode, the record mode of the recording section 404 is changed from the moving image recording mode to

the still image recording mode in step S206, then the control proceeds to step S204.

In step S204, addition control is performed by setting the value K of the adders 402b and 402d to 1 so
5 as not to perform fine pixel-shifting operation, based on the above-described reason. Then, the control proceeds to step S205 where it is determined whether or not an image sensing start switch (not shown) has been depressed. In a case where the image sensing start
10 switch is not depressed, the process ends without further processing. In a case where the image sensing start switch is depressed, still image sensing is executed in step S207 and the control operation ends.

Meanwhile, in a case where the image sensing mode
15 switch 411 is set in the moving image sensing mode in step S202, it is determined in step S208 whether or not the record mode of the recording section 404 is ready for a moving image, i.e., set in the moving image recording mode. If the recording section 404 is set in
20 the moving image recording mode, the process proceeds directly to step S209, while if the recording section 404 is set in the still image recording mode, the record mode of the recording section 404 is changed from the still image recording mode to the moving image recording
25 mode in step S211, then the control proceeds to step S209.

In step S209, as similar to the conventional example, addition control for fine pixel-shifting operation is performed by calculating an addition ratio value K for the adders 402b and 402d, in order to

5 perform correction for an amount less than one pixel based on the correction target value data. Then, the control proceeds to step S210 where it is determined whether or not an image sensing start switch (not shown) has been depressed. In a case where the image sensing

10 start switch is not depressed, the process ends without further processing. In a case where the image sensing start switch is depressed, moving image sensing is executed in step S212 and the control operation ends.

By the above operation, the fine pixel-shifting

15 operation is performed when sensing a moving image, as conventionally performed. As a result, an image where connections between image fields are smooth is obtained. Meanwhile in a case of sensing a still image, since the fine pixel shifting is not performed, it is possible to

20 obtain an image where resolution is not greatly deteriorated.

<Modified Example of First Embodiment>

25 Next, a modified example of the first embodiment will be described with reference to Fig. 13. Fig. 13 is a block diagram showing a construction of an image

sensing apparatus according to a modified example to the first embodiment which will be described later.

Components shown in Fig. 13, which are identical to that of the aforementioned conventional example in Fig. 1 and that of the first embodiment in Fig. 11, have the same reference numerals.

Fig. 13 differs from Fig. 11 by having a first switch 301 and a second switch 302 in addition to the construction shown in Fig. 11. The first switch 301 and the second switch 302 select a-a' or b-b' in accordance with the switching mode of the image sensing mode switch 411, wherein a-a' is a route in which image signals flow from the image sensing device 401b to the first adder 402b, then through the second delay 402c and second adder 402d to the signal processor 403, while b-b' is a route in which image signals flow from the image sensing device 401b to the signal processor 403 directly.

A switch, capable of switching the image signal flows may be employed for the first switch 301 and the second switch 302. The switching operation is controlled such that the first switch 301 and the second switch 302 are switched simultaneously.

For sensing a moving image, the first switch 301 and the second switch 302 select the a-a' side so that not only the vibration correction operation which is executed by extracting an image from the image sensing

device 401b, but also the above-described pixel shifting control is performed. Accordingly, smooth anti-vibration operation is performed.

For sensing a still image, the first switch 301
5 and the second switch 302 select the b-b' side so that vibration correction operation, executed by extracting an image from the image sensing device 401b, is performed without using the block including the first delay 402a, the second delay 402c, first adder 402b, and
10 the second adder 402d. Accordingly, a still image where resolution is not deteriorated can be obtained.

<Second Embodiment>

15 Fig. 14 is a block diagram showing a construction of an image sensing apparatus (video camera) according to the second embodiment of the present invention. In Fig. 14, reference numeral 101 denotes lenses; 102, an image sensing device such as a CCD or the like; 103, an
20 amplifier; 104, a camera signal processor; 105, an enlargement/interpolation/pixel shifting circuit for performing enlargement process, interpolation process, and pixel shifting process on image data; 106, a CCD driver; 107, a pitch angular velocity sensor; 108; a yaw
25 angular velocity sensor; 109 and 110, amplifiers; 111, an anti-vibration control microcomputer; and 112, a switch. Note that the pitch angle sensor 107 and the yaw

angle sensor 108 of the second embodiment correspond to the vibration detector 405 of the first embodiment, and the anti-vibration control microcomputer 111 of the second embodiment correspond to the correction variable calculator 408 of the first embodiment.

An enlargement or magnifying process by the circuit 105 is to compensate for the difference in pixel number of the CCD 102 between in vertical and horizontal directions so that there occurs no difference in resolution between in the directions, and increases the number of apparent pixels by magnifying the image in the less direction in pixel number. The circuit 105 is also capable of performing pixel-interpolation process so as to generate a pixel at shift position where a shift amount of the pixel shift or displacement for anti-vibration includes a shift less than one pixel. Further, the circuit 105 is capable of shifting a read-out start position in the CCD 102. In the second embodiment, since the interpolation process is performed accompanied with the pixel displacement operation, the pixel shift for anti-vibration includes the interpolation operation and the shifting of the read-out start position. Hereafter, a pixel shift operation by shifting the read-out start position will be referred to as "rough pixel shifting", while a pixel shifting in less than one pixel is as "fine pixel shifting".

Referring to Fig. 14, light from an object passes through the lenses 101 and an image is formed on the image sensing device 102. The image on the image sensing device 102 is photoelectrically converted, then

5 amplified to an appropriate level by the amplifier 103, inputted to the camera signal processor 104, and converted to standard video signals.

The image sensing apparatus shown in Fig. 14 comprises an electronic image stabilization function.

10 Activation or non-activation of this anti-vibration function is determined by detecting the state of the switch 112. The pitch and yaw angular velocity sensors 107 and 108 detect vibration angular velocity of the image sensing apparatus. The angular velocity signals

15 are amplified by the amplifiers 109 and 110, and inputted to the anti-vibration control microcomputer 111, then integrated and calculated as an angle displacement. In accordance with the displacement angle θ obtained in the foregoing manner and a focal point distance f of the

20 optical system, the pixels (corresponding to $f \times \tan\theta$) displaced on the image sensing device 102 due to vibration are shifted to the direction opposite to the displaced direction, thereby performing vibration correction.

25 Figs. 15A and 15B are explanatory views for explaining an image area extracted by electronic anti-

0025549.022200
vibration control. In Fig. 15A, reference numeral 201
denotes an effective pixel area of the image sensing
device 102. The start point (x_0 , y_0) of a section 202
(hereinafter referred to as a partial area 202) of the
5 effective pixel area is moved in the range of the
effective pixel area 201 in a way that only the partial
area 202 is extracted and vibration correction is
performed. Then, the partial area 202 only is displayed
on a monitor such as a video monitor or a finder or the
10 like.

As a technique of such displaying operation, the
first technique is to temporarily store an image for the
effective pixel area 201 by using a field memory, and
while reading the image for the partial area 202 from
15 the memory, enlarge the image so as to fit in the area
203 shown in Fig. 15B and interpolate the
horizontal/vertical scan lines. The second technique is
to employ a large CCD having high density and a large
number of pixels as the image sensing device 102 so that
20 the extraction area of the partial area 202 satisfies
the number of scan lines necessary for the standard
video signals. Both techniques require an expensive
field memory or a large CCD. Therefore, the second
embodiment of the present invention utilizes a CCD for
25 the widely used PAL (phase alternation line) for an
image sensing apparatus complying with the NTSC

002220-6455260

(National Television System Committee).

The CCD for PAL has a high pixel density in the vertical direction. Therefore, with respect to the vertical scan direction, an image may be extracted without further process by using the CCD driver 106, e.g., a timing generator or the like. With respect to the horizontal scan direction, enlargement process is performed in a vertical-horizontal ratio by using a line memory. By this, an inexpensive vibration correction apparatus is realized.

The image sensing apparatus in Fig. 14 has a construction having the above-described correction system. When pixel shifting is performed in the vertical scan direction, rapid drain control is performed by the CCD driver 106 to extract a desired scan area. Specifically, in the second embodiment, image data is read out of the CCD 102, alternately as illustrated in Fig. 8B and Fig. 8C. The alternate reading-out causes to change pixel combinations, the camera signal processor 104 is controlled such that color process corresponding to the pixel arrangement is performed. When pixel shifting is performed in the horizontal scan direction, a read-out start position of a horizontal scan image, stored in the enlargement/interpolation/pixel shifting circuit 105 where image signals processed by the camera signal processor 104 are inputted, is varied in

accordance with the amount of pixel shifting for vibration correction, and the enlargement and interpolation are performed in an appropriate vertical-horizontal ratio. With regard to shifting an amount less than one pixel (hereinafter referred to as a "decimal fraction section"), the enlargement/interpolation/pixel shifting circuit 105 can perform fine pixel shifting.

Anti-vibration control operation of the image sensing apparatus according to the second embodiment will be described with reference to the flowcharts in Figs. 16 and 17.

The flowchart in Fig. 16 shows a process of calculating an angle displacement by integrating the angular velocity signals detected by the angular velocity sensors 107 and 108. This process is a periodic interruption process executed by the anti-vibration control microcomputer 111, and executed with a frequency ten times larger than the field frequency, i.e., 600 Hz in a case of the NTSC, in the second embodiment. This frequency corresponds to a sampling frequency of the angular velocity signal i.e., the frequency of the calculated angle displacement. The interruption process of the anti-vibration control microcomputer 111 starts when, for instance, a counter counting up/down at a predetermined frequency dividing of an oscillation clock coincides with data corresponding to 1/600 sec. Although

angular velocity signals are inputted to an A/D converter of the anti-vibration control microcomputer 111 as described in Fig. 14, for the purpose of simple description of the present embodiment, it is assumed
5 herein that the operation mode of the A/D converter is set in a scan mode in which A/D operation is repeated all the time.

Referring to Fig. 16, first in step S301, angular velocity signals obtained as an A/D sample are subjected
10 to high-pass filtering process so as to remove an influence of DC components. Next in step S302, the angular velocity signals, in which band area is limited, are integrated and an angle displacement is calculated. The calculated angle displacement corresponds to the
15 displacement angle of the image sensing apparatus body. The processes performed during steps S303 and S305 are the routine for determining whether or not displacement angle calculation is performed ten times in one field. More specifically, in step S303, a register m storing
20 the number of times parameters is incremented by one. In step S304, it is determined whether or not $m=10$ is satisfied. If $m=10$ is satisfied, i.e., if the interruption process has been performed ten times, $m=0$ is set in step S305 and initialization is performed for
25 the next field. Then, the control operation ends.

Meanwhile, if $m=10$ is not satisfied in step S304,

i.e., if the interruption process has not been performed ten times, the aforementioned step S305 is skipped and the control operation ends.

The control steps shown in Fig. 17 are performed
 5 once for each processing period of one field. The control steps shown in Fig. 16 are executed ten times in the processing period of one field. The control steps in Fig. 17 are performed before starting the process for the next field, i.e., at the end of the process for the
 10 present field.

Referring to Fig. 17, in step S401, determination of $m=0$ is made until $m=0$ is satisfied. When $m=0$ is satisfied, i.e., the interruption process has been performed ten times in the present field and m is
 15 initialized, it is determined in the next step S402 whether or not anti-vibration function is activated based on the state of the switch 112. If the switch 112 is ON, i.e., anti-vibration function is activated, the calculation process is executed for calculating target
 20 position coordinates (V_o , H_o) of the extraction position. Herein, the target position is given by the following equations (1) and (2) with reference to Fig. 18:

$$V_o = V_c \pm N_v = V_c \pm (-1) \cdot \frac{f \cdot \tan \theta_p}{L_v} \quad \dots (1)$$

25

$$H_o = H_c \pm N_v = H_c \pm (-1) \cdot \frac{f \cdot \tan \theta_y}{L_H} \quad \dots (2)$$

where V_c and H_c denote vertical and horizontal positions respectively where a reading out starts when the vibration correction is not necessary, θ_p and θ_y denote displacement angles in pitch and yaw directions, respectively, L_v and L_h are vertical and horizontal lengths of the CCD, respectively, and N_v and N_y are numbers of shifting pixels for correcting displacement angle in the pitch and yaw directions.

H_0 and V_0 obtained by the above equations (1) and (2) are coordinates where the reading-out starts for anti-vibration control, and thus, is expected to have an integer part and a decimal fragment part. The decimal fragment part includes important information for performing the anti-vibration control with maintaining a resolution, and a shift amount represented by the part is less than one pixel. The rough pixel shift control performed by the circuit 105 is achieved by means of reading out of a memory each unit of which corresponds to one pixel. The information included in the decimal fragment part is utilized in the interpolation operation by the circuit 105, namely the fine pixel shift control.

Reading out of the CCD 102 according to the second embodiment comprises interlaced readings at even number lines and odd number lines which occur every two lines (pixels in the vertical direction). Further, the readings every two pixels are only made for vertical

readings but not for horizontal readings of the CCD 102.
Therefore, the fine pixel shifting according to the
second embodiment must be different for in the vertical
and horizontal directions from each other.

5 First, the method and scheme for shifting an
extraction area and a fine pixel shifting in the
vertical direction will be described below. Letting an
integer part and decimal part of the shift amount V_0 in
the vertical direction as $\text{Int}(V_0)$ and $\text{Dec}(V_0)$,
10 respectively, the following equation holds:

$$V_0 = \text{Int}(V_0) + \text{Dec}(V_0) \quad \dots (3)$$

Where $\text{Int}(V_0)$ is odd number, and $\text{Evn}(V_0)$ denotes the
15 greatest even number which does not exceed the number V_0 ,
it holds:

$$V_0 = \text{Evn}(V_0) + 1 + \text{Dec}(V_0) \quad \dots (4)$$

20 and where $\text{Int}(V_0)$ is an even number, it holds:

$$V_0 = \text{Evn}(V_0) + \text{Dec}(V_0) \quad \dots (5)$$

The second embodiment performs an extraction operation
25 of the image area accompanied with CCD reading-out as
illustrated in Fig. 8B, e.g., and an extraction
operation accompanied with CCD reading-out as
illustrated in Fig. 8C. In the second embodiment, while

the extraction operates is performed, a fine pixel shifting by less than one pixel is operated in accordance with the value of $\text{Dec}(V_0)$ for each pixel.

Described will be the fine pixel shifting in the
5 vertical direction below.

In order to initiate the fine pixel shifting, it is necessary to determine a distribution ratio K between two adjacent pixels in step S404. At first, distribution ratio K_v in the vertical direction will be described. In
10 the second embodiment, the distribution ratio in the vertical direction K_v is determined in accordance with $\text{Dec}(V_0)$ or $1 + \text{Dec}(V_0)$, and is determined to be as $1/8$ or $7/8$.

As set forth above, CCD reading out according to
15 the second embodiment is performed at two pixel pitch. Thus, fine pixel shifting with shift amount of less than one pixel would deteriorate resolution at interpolated pixels because the interpolations are made between two pixels with two pixel distance apart. The second
20 embodiment performs interpolations as illustrated in Fig. 19 in order to achieve both the prevention of unevenness in resolution and high resolution. In Fig. 19, the vertical axis represent image (pixel position). 500 to 503 represent an image signal (signals obtained by the
25 reading-out as illustrated in Fig. 8B), 504-506 denote image signals with one pixel shift with respect to the

signals 500 to 503 (signals obtained by the reading-out as illustrated in Fig. 8C). 600 to 612 are image signals generated by interpolating the image signals 500 to 508. The interpolated image 600 is generated by a

- 5 proportional distribution (ratio $1/8 : 7/8$) of the image data 500 and 502, and the interpolated image signal 603 is with proportional distribution ratio $7/8 : 1/8$, from image signals 500 and 502. On the other hand, the interpolated image 604 is generated by a proportional
- 10 distribution (ratio $1/8 : 7/8$) of the image data 502 and 503, and the interpolated image signal 608 is with proportional distribution ratio $7/8 : 1/8$, from image signals 502 and 503.

- Fig. 20 illustrates the image signals 502, 503,
- 15 505, 506, 604, 605, 606 and 607 extracted from Fig. 19 so that a reason why the uneven resolution is prevented according to the second embodiment is explained,

- As seen from Fig. 20, pixels of the interpolated images (that are output image signals) are apart from
- 20 each adjacent pixel by $1/2$ pixel distance. In other words, the interpolation image has twice as fine in space resolving power as original images. The image signal 604, e.g. is generated by proportionally distributing the image signals 502 and 503 with ratio of
- 25 $1:7$, while the image signal 605 is generated by proportionally distributing the image signals 505 and

determine K_v to be either one of $1/8$ or $7/8$ by quantization.

Fig. 21 explains a distribution of values of K_v according to the second embodiment, and therefore, how K_v are quantized. In Fig. 21, 700 denotes a position where an image extraction starts when $\text{Dec}(V_0)$ is equal to "0", and points 701 to 704 denote a position where an image extraction starts when $\text{Dec}(V_0)$ is unequal to "0". As set forth above, the decimal fragment part $V_0 - \text{Evn}(V_0)$ of the starting point V_0 can be within the range 0 to 2. Specifically, extraction starting point is coincident with:

- point 701 when $0 < V_0 - \text{Evn}(V_0) \leq 0.5$,
- point 702 when $0.5 < V_0 - \text{Evn}(V_0) \leq 1.0$,
- 15 point 703 when $1.0 < V_0 - \text{Evn}(V_0) \leq 1.5$,
- point 704 when $1.5 < V_0 - \text{Evn}(V_0) \leq 2.0$.

As seen from the comparison of Figs 19 and 20, if $(V_0 - \text{Evn}(V_0)) = 0$, start point in the vertical direction is coincident with the point 700. If $0 < V_0 - \text{Evn}(V_0) \leq 0.5$,
20 the start point 701 should be quantized into the pixel 600, therefore, K_v is set to $1/8$. In this case, normal image data which are not subjected to one pixel shifting (image data read-out in accordance with the Fig. 8B timing) are used.

if $(V_0 - \text{Evn}(V_0)) = 0$, the start point in the vertical direction is set to be coincident with the point 700.

If $0 < V_0 - \text{Evn}(V_0) \leq 0.5$, the start point 7 0 1
5 should be quantized into the pixel 600, therefore, K_v is set to 1/8. In this case, normal image data which are not subjected to one pixel shifting (image data read-out in accordance with the Fig. 8B timing) are used.

If $0.5 < V_0 - \text{Evn}(V_0) \leq 1.0$, the start point 7 0 2
10 should be quantized into the pixel 603, therefore, K_v is set to 7/8. In this case, normal image data which are not subjected to one pixel shifting (image data read-out in accordance with the Fig. 8B timing) are used.

If $1.0 < V_0 - \text{Evn}(V_0) \leq 1.5$, the start point 7 0 3
15 should be quantized into the pixel 602, therefore, K_v is set to 1/8. In this case, normal image data which are subjected to one pixel shifting (image data read-out in accordance with the Fig. 8C timing) are used.

If $1.5 < V_0 - \text{Evn}(V_0) \leq 2.0$, the start point 7 0 4
20 should be quantized into the pixel 605, therefore, K_v is set to 7/8. In this case, normal image data which are subjected to one pixel shifting (image data read-out in accordance with the Fig. 8c timing) are used.

The above describes how K_v is determined in step
25 S404 according to the second embodiment.

Next, the pixel shifting in the horizontal direction will be explained. As set forth above, reading out of the CCD 102 is performed in accordance with the read out sequence as illustrated in Fig. 8B or that sequence as illustrated in Fig. 8C. Such modulation according to the reading out has effects on only the vertical direction. Therefore, in the second embodiment, as for the horizontal direction, the switching control of readings out of CCD is not performed. Specifically, since

$$H_0 = \text{Int}(H_0) + \text{Dec}(H_0) \quad \cdots (6)$$

holds, positions of interpolated pixels in the horizontal direction are determined to be intermediate between two adjacent pixels in the horizontal direction in accordance with the value of $\text{Dec}(H_0)$. Specifically, if $[\text{Dec}(H_0)]$ is an integer which does not exceed $\text{Dec}(H_0)$, an interpolated pixel of n-th and (n+1)-th pixels is set at the position which is proportionally distributed in accordance with the ratio:

$$K_H : (1-K_H)$$

where K_H is defined as $K_H = [\text{Dec}(H_0)]$.

Returning to the flowchart of Fig. 17, in step S404, pixel shifting ratio data K_v and K_H are determined based on the decimal fraction part of the target

position coordinate data expressed by the above-described number of pixels. In practice, pixel-shifting data K_v and K_h may be set to any value from 0 to 1. It is so set that pixel-shifting data K_v or K_h is 1 when
5 the decimal fraction part is 0.

In the next step S405 which is the process characteristic to the present invention and the details are set forth above. The correction variable data is regenerated so as to achieve constant resolution on the
10 screen. In step S406, the target position coordinates (V_0 , H_0) calculated in step S403 are outputted as a command to the CCD driver 106 and the enlargement/interpolation/pixel shifting circuit 105 as the position to be extracted. In addition, the setting
15 of color process of the camera signal processor 104 is changed in accordance with the setting of the extraction position (the camera signal processor 104, enlargement/interpolation/pixel shifting circuit 105, and CCD driver 106 operate such that the extraction
20 position is outputted as commanded in the next field). Then, the process returns to step S401 for processing the next field until integration is performed ten times.

Meanwhile, in the foregoing step S402, if the switch 112 is OFF, i.e., anti-vibration function is not
25 activated, the value for pixel shifting is set to 1 in step S407 (not performing pixel shifting), and a command

for extracting the center of the screen and a pixel shifting value set in the foregoing step S407 are respectively outputted in step S408.

Why the distribution ratio according to the second
5 embodiment is set to 7:1 or 1:7 will be explained below.

As illustrated in Figs. 19 and 20, the second
embodiment interpolates two pixels between two adjacent
pixels so that the resolving power may be doubled. The
second embodiment necessitates to generate the
10 interpolated pixels so that they may have equally spaced.
In order to achieve the double resolving power as well
as the equal intervals, an interval between one pixel
which is normally transferred (like pixel 502) and one
pixel which is shifted by one-pixel distance (like pixel
15 506) have to be divided into divisional ratio 1:2:1. In
other words, the interval between two pixels which are
displaced from each other by one pixel distance must be
divided into four subintervals. In this connection, the
a pair of two pixels (for instance, the pixels 502 and
20 506) cannot be read out simultaneously, as shown in Fig.
8. For this reason, the second embodiment divides into
eight (8) sub-intervals, an interval between two pixels
which are spaced by two pixel distance (pairs of pixels
each of which are two pixels from the normal image
25 signal, such as pixels 502 and 503, or pairs of pixels
each of which are two pixels from one-pixel-distance-

shifted pixel, such as pixels 506 and 507), and then proportionally divides the interval with ratio 1/8:7/8.

- As has been described above, according to the image sensing method and apparatus of the second
- 5 embodiment, pixel shifting operation is performed in combination with the operation of changing the pixel area normally transferred at one pixel pitch in anti-vibration operation. Each of these operations is controlled appropriately so as to use a predetermined
- 10 correction position only. This attains the effects of securing a resolution necessary for anti-vibration, keeping the resolution constant on a screen, highly effective anti-vibration, and a stable screen image.
- 15 The present invention is not limited to the above embodiments and various changes and modifications can be made within the spirit and scope of the present invention. Therefore, to appraise the public of the scope of the present invention, the following claims are
- 20 made.

WHAT IS CLAIMED IS:

1. An image sensing method comprising:
- a vibration detecting step of detecting vibration
- 5 of an image sensing apparatus main body;
- a calculating step of calculating a correction variable based on vibration data indicative of the vibration of the image sensing apparatus main body detected in said vibration detecting step;
- 10 a control step of controlling a timing of reading an image signal from an image sensing device based on a calculation result of said calculating step;
- a delaying step of delaying the read image signal by predetermined time;
- 15 an adding step of adding the read image signal to the delayed image signal, delayed in said delaying step, at a predetermined addition ratio based on the calculation result of said calculating step; and
- an addition control step of prohibiting addition
- 20 of said adding step when sensing a still image.
2. The image sensing method according to claim 1, further comprising:
- a switching step of switching between a still
- 25 image sensing mode and a moving image sensing mode; and
- a recording step of performing recording operation

of the still image based on a mode switched in said switching step.

3. An image sensing method comprising:

5 a vibration detecting step of detecting vibration of an image sensing apparatus main body;

a calculating step of calculating a correction variable based on vibration data indicative of the vibration of the image sensing apparatus main body
10 detected in said vibration detecting step;

a control step of controlling a timing of reading an image signal from an image sensing device based on a calculation result of said calculating step;

a delaying step of delaying the read image signal
15 by predetermined time;

an adding step of adding the read image signal to the delayed image signal, delayed in said delaying step, at a predetermined addition ratio based on the calculation result of said calculating step; and

20 an addition ratio control step of controlling the addition ratio, used in said adding step, to 1:0 when sensing a still image.

4. The image sensing method according to claim

25 3, further comprising:

a switching step of switching between a still

image sensing mode and a moving image sensing mode; and
a recording step of performing recording operation
of the still image based on a mode switched in said
switching step.

5

5. An image sensing apparatus comprising:
vibration detecting means for detecting vibration
of the image sensing apparatus main body;
calculating means for calculating a correction
10 variable based on vibration data indicative of the
vibration of the image sensing apparatus main body
detected by said vibration detecting means;
control means for controlling a timing of reading
an image signal from an image sensing device based on a
15 calculation result of said calculating means;
delaying means for delaying the read image signal
by predetermined time;
adding means for adding the read image signal to
the delayed image signal, delayed by said delaying means,
20 at a predetermined addition ratio based on the
calculation result of said calculating means; and
addition control means for prohibiting addition of
said adding means when sensing a still image.

- 25 6. The image sensing apparatus according to
claim 5, further comprising:

switch means for switching between a still image sensing mode and a moving image sensing mode; and

recording means for performing recording operation of the still image based on a switched mode of said

5 switch means.

7. The image sensing apparatus according to claim 5, wherein said vibration detecting means is an angular velocity sensor.

10

8. An image sensing apparatus comprising:

vibration detecting means for detecting vibration of an image sensing apparatus main body;

15 calculating means for calculating a correction variable based on vibration data indicative of the vibration of the image sensing apparatus main body detected by said vibration detecting means;

control means for controlling a timing of reading an image signal from an image sensing device based on a calculation result of said calculating means;

20

delaying means for delaying the read image signal by predetermined time;

adding means for adding the read image signal to the delayed image signal, delayed by said delaying means,

25

at a predetermined addition ratio based on the calculation result of said calculating means; and

addition ratio control means for controlling the addition ratio, used by said adding means, to 1:0 when sensing a still image.

5 9. The image sensing apparatus according to claim 8, further comprising:

switch means for switching between a still image sensing mode and a moving image sensing mode; and

recording means for performing recording operation
10 of the still image based on a switched mode of said switch means.

10. The image sensing apparatus according to claim 8, wherein said vibration detecting means is an
15 angular velocity sensor.

11. A storage medium storing a control program for controlling an image sensing apparatus, said control program having control modules comprising the steps of:

20 detecting vibration of an image sensing apparatus main body;

calculating a correction variable based on vibration data indicative of the detected vibration of the image sensing apparatus main body;

25 controlling a timing of reading an image signal from an image sensing device based on a calculation

result;

delaying the read image signal by predetermined time;

adding the read image signal to the delayed image
5 signal at a predetermined addition ratio based on the calculation result; and

controlling to prohibit the adding step when sensing a still image.

10 12. The storage medium according to claim 11, said control program having control modules comprising the steps of:

switching between a still image sensing mode and a moving image sensing mode; and

15 controlling to perform recording operation of the still image based on a switched mode.

13. A storage medium storing a control program for controlling an image sensing apparatus, said control
20 program having control modules comprising the steps of:

detecting vibration of an image sensing apparatus main body;

calculating a correction variable based on vibration data indicative of the detected vibration of

25 the image sensing apparatus main body;

controlling a timing of reading an image signal

from an image sensing device based on a calculation
result;

delaying the read image signal by predetermined
time;

5 adding the read image signal to the delayed image
signal at a predetermined addition ratio based on the
calculation result; and

controlling the addition ratio to 1:0 when sensing
a still image.

10

14. The storage medium according to claim 13,
said control program having control modules comprising
the steps of:

switching between a still image sensing mode and a
15 moving image sensing mode; and

controlling to perform recording operation of the
still image based on a switched mode.

15. An image sensing method comprising:
20 an image sensing step of sensing an object; and
a vibration correction control step of correcting
vibration of an image sensing apparatus main body,
wherein in said vibration correction control step,
only a predetermined correction position is used among
25 settable correction positions.

16. The image sensing method according to claim 15, wherein in said vibration correction control step, the vibration of the image sensing apparatus main body is electrically corrected.

5

17. The image sensing method according to claim 16, wherein in said vibration correction control step, signals for adjacent pixels are read simultaneously in the vertical direction from an image sensing device which is employed in said image sensing step, and a scan pixel area is changed at a minimum of one pixel pitch.

18. The image sensing method according to claim 17, wherein said vibration correction control step includes a shifting step of shifting an image up or down by adding image signals of vertically neighboring image signals.

19. The image sensing method according to claim 18, wherein in said vibration correction control step, only a predetermined correction position is utilized by appropriately controlling a shift amount of the scan pixel area and an addition ratio of the vertically neighboring image signals.

25

20. The image sensing method according to claim

15, wherein said image sensing apparatus is a video camera.

21. An image sensing method comprising:
5 an image sensing step of sensing an object; and
a vibration correction control step of correcting vibration of an image sensing apparatus main body,
wherein in said vibration correction control step,
an image is shifted up or down by changing a scan pixel
10 area at one pixel pitch and adding vertically neighboring image signals at a predetermined addition ratio so as to keep resolution of the image signals constant.

15 22. The image sensing method according to claim 21, wherein in said vibration correction control step, the addition ratio of the vertically neighboring image signals is fixed to 1:7 or 7:1, and a correction pitch is set at 1/2 pixel pitch.

20

23. The image sensing method according to claim 21, wherein said image sensing apparatus is a video camera.

25 24. An image sensing apparatus comprising:
image sensing means for sensing an object; and

0925549-022209
62220-6455260

vibration correction control means for correcting vibration of an image sensing apparatus main body,

wherein said vibration correction control means uses only a predetermined correction position among
5 settable correction positions.

25. The image sensing apparatus according to claim 24, wherein said vibration correction control means electrically corrects the vibration of the image
10 sensing apparatus main body.

26. The image sensing apparatus according to claim 25, wherein said vibration correction control means simultaneously reads signals for adjacent pixels
15 in the vertical direction from an image sensing device which is employed by said image sensing means, and changes a scan pixel area at a minimum of one pixel pitch.

20 27. The image sensing apparatus according to claim 26, wherein said vibration correction control means includes shifting means for shifting an image up or down by adding vertically neighboring image signals.

25 28. The image sensing apparatus according to claim 27, wherein said vibration correction control

means utilizes only a predetermined correction position,
by appropriately controlling a shift amount of the scan
pixel area and an addition ratio of the vertically
neighboring image signals.

5

29. The image sensing apparatus according to
claim 24, wherein said image sensing apparatus is a
video camera.

10

30. An image sensing apparatus comprising:
image sensing means for sensing an object; and
vibration correction control means for correcting
vibration of an image sensing apparatus main body,
wherein said vibration correction control means

15

shifts an image up or down by changing a scan pixel area
at one pixel pitch and adding vertically neighboring
image signals at a predetermined addition ratio so as to
keep resolution of the image signals constant.

20

31. The image sensing apparatus according to
claim 30, wherein said vibration correction control
means fixes the addition ratio of the vertically
neighboring image signals to 1:7 or 7:1, and sets a
correction pitch at 1/2 pixel pitch.

25

32. The image sensing apparatus according to

claim 30, wherein said image sensing apparatus is a video camera.

33. A storage medium storing a control program
5 for controlling an image sensing apparatus, said control program having control modules comprising the step of controlling such that vibration correction control means which corrects vibration of an image sensing apparatus main body uses only a predetermined correction position
10 among settable correction positions.

34. The storage medium according to claim 33,
wherein said vibration correction control means electrically corrects the vibration of the image sensing
15 apparatus main body.

35. The storage medium according to claim 34,
wherein said vibration correction control means simultaneously reads signals for adjacent pixels in the
20 vertical direction from an image sensing device which is employed by said image sensing means, and changes a scan pixel area at a minimum of one pixel pitch.

36. The storage medium according to claim 34,
25 wherein said vibration correction control means includes shifting means for shifting an image up or down by

adding vertically neighboring image signals.

37. The storage medium according to claim 34,
wherein said vibration correction control means utilizes
5 only a predetermined correction position, by
appropriately controlling a shift amount of the scan
pixel area and an addition ratio of the vertically
neighboring image signals.

10 38. The storage medium according to claim 33,
wherein said image sensing apparatus is a video camera.

39. A storage medium storing a control program
for controlling an image sensing apparatus, said control
15 program having control modules comprising the step of
shifting an image up or down by changing a scan pixel
area at one pixel pitch and adding vertically
neighboring image signals at a predetermined addition
ratio to correct vibration of an image sensing apparatus
20 main body, and making the predetermined addition ratio
constant so as to keep resolution of the image signals
constant.

40 The storage medium according to claim 34,
25 wherein said vibration correction control means fixes
the addition ratio of the vertically neighboring image

signals to 1:7 or 7:1, and sets a correction pitch at
1/2 pixel pitch.

41. The storage medium according to claim 38,
5 wherein said image sensing apparatus is a video camera.

0025549.022299
662220.6455260

ABSTRACT OF THE DISCLOSURE

662220-6455260

A correction variable is calculated based on vibration data of an image sensing apparatus. Based on
5 the calculation result, timing of reading image signals from an image sensing device is controlled. The read image signals are delayed by predetermined time, the read image signals and the delayed image signals are added at a predetermined addition ratio based on the
10 calculation result of the correction variable calculator. In still image sensing, the above addition operation is not performed.

FIG. 1

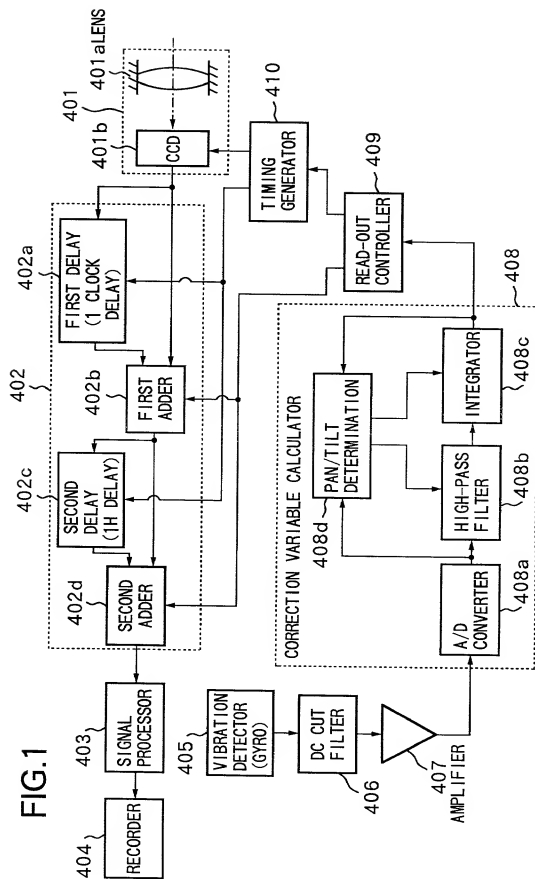
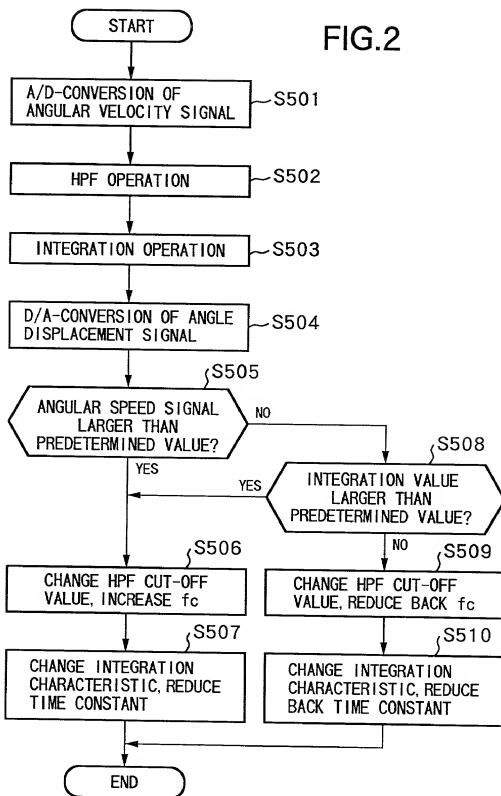
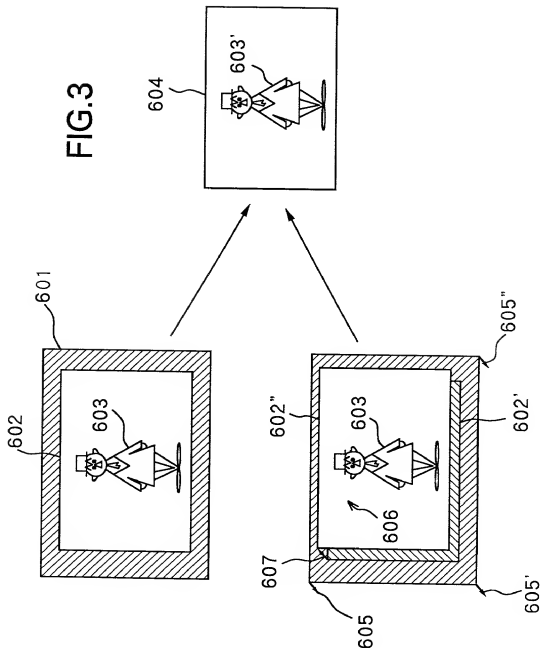
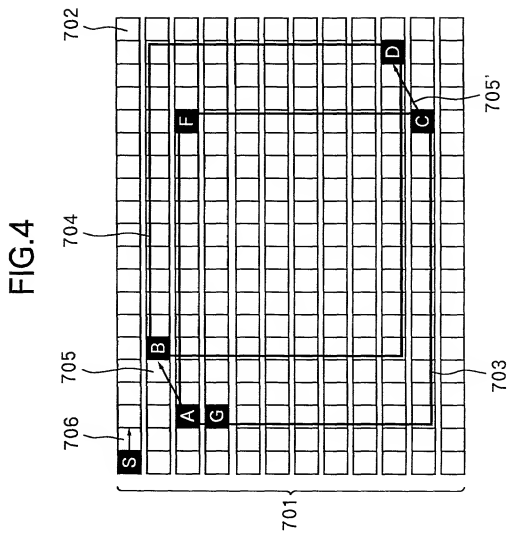


FIG.2







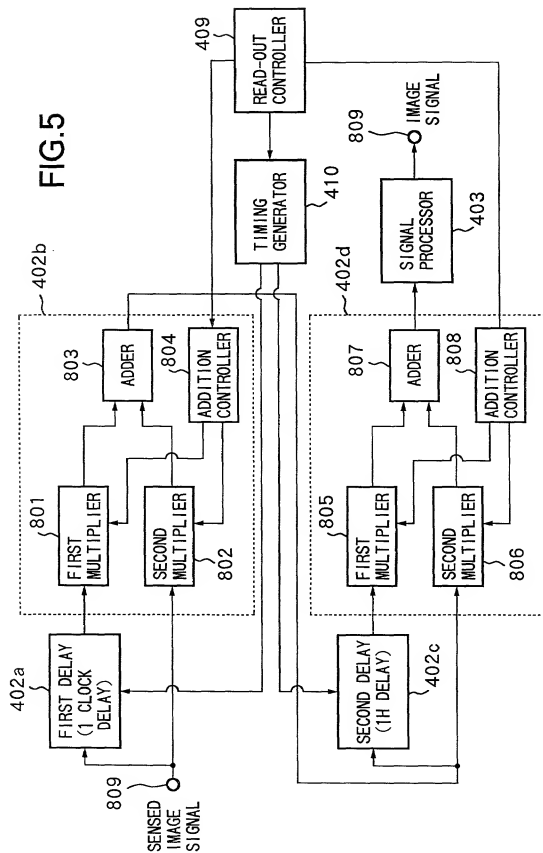


FIG.6A

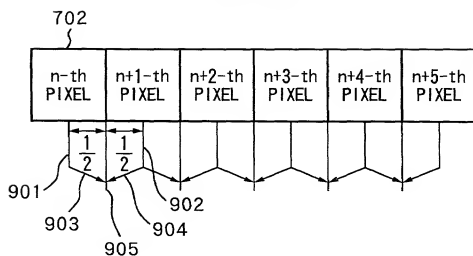


FIG.6B

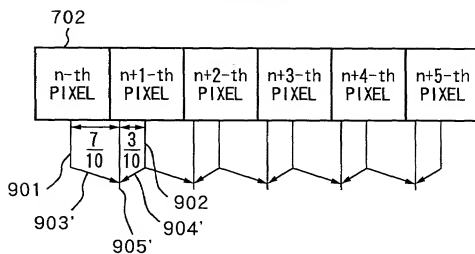


FIG. 7A

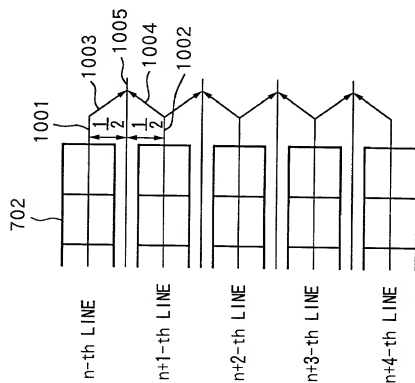


FIG. 7B

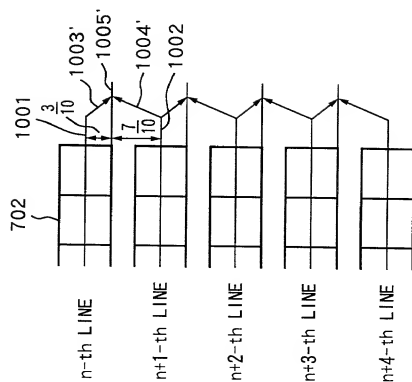


FIG.8A




FIG.8B





FIG.8C



Y: YELLOW COLOR FILTER
 C: CYAN COLOR FILTER
 M: MAGENTA COLOR FILTER
 G: GREEN COLOR FILTER

FIG.9

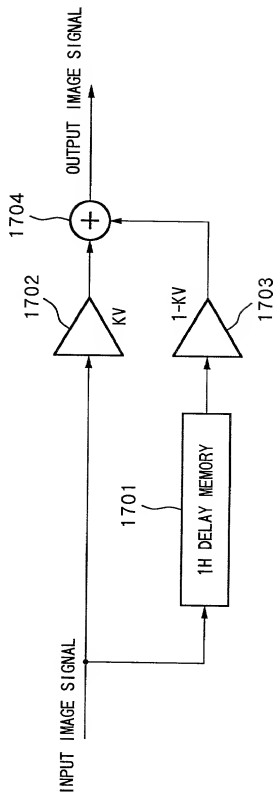


FIG.10

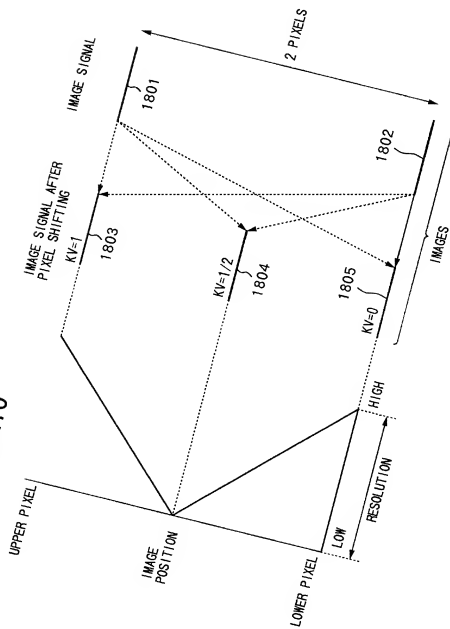


FIG.11

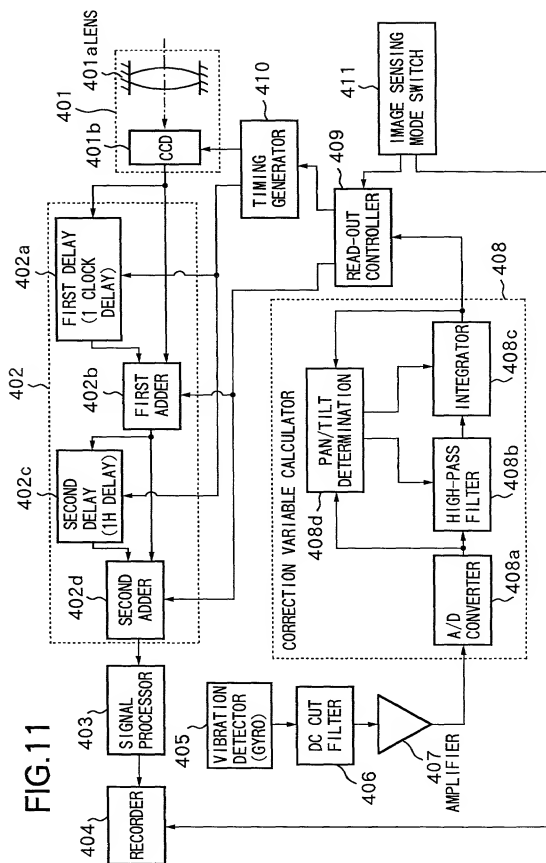


FIG.12

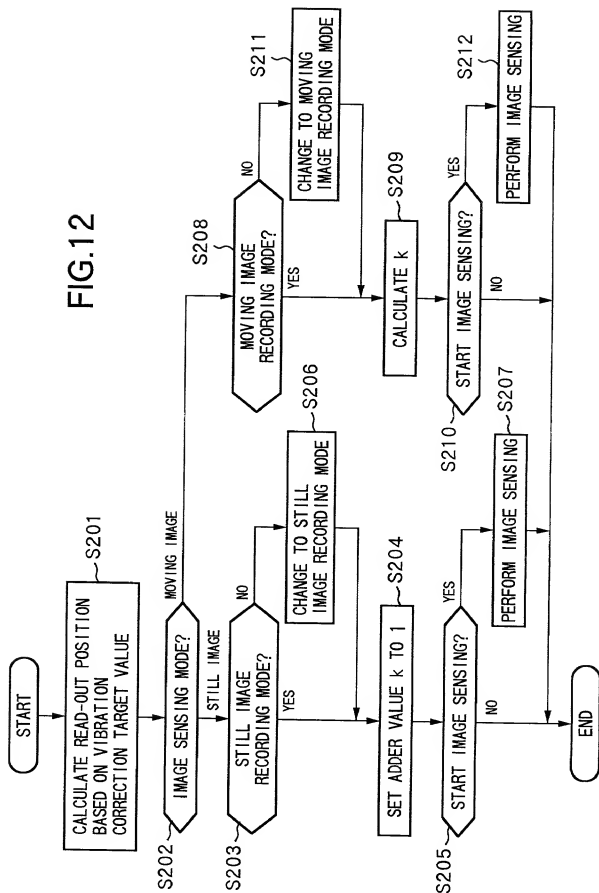


FIG. 13

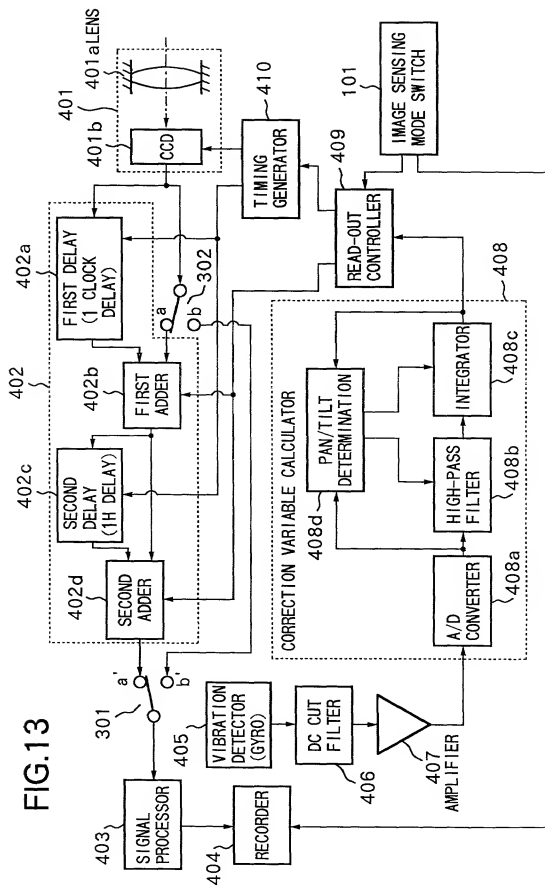
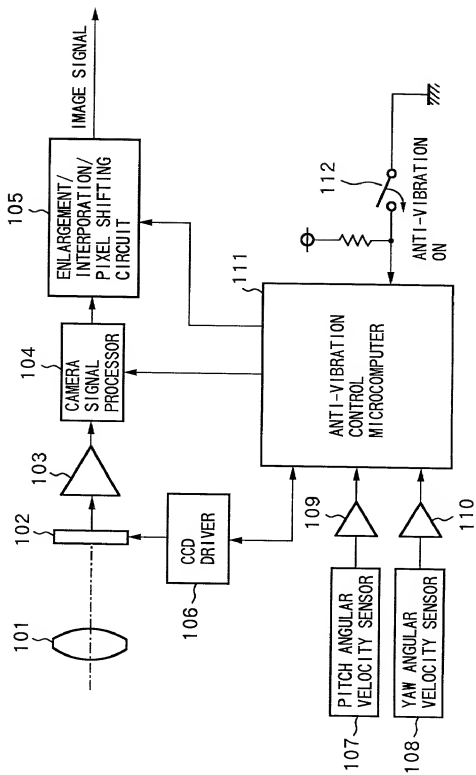


FIG.14



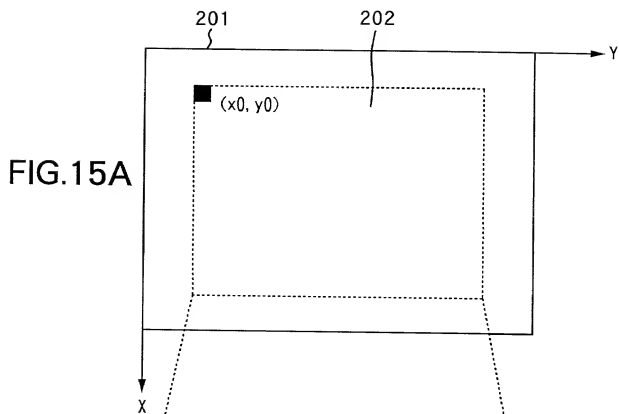


FIG.15B

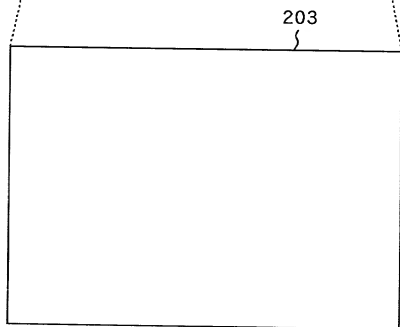


FIG.16

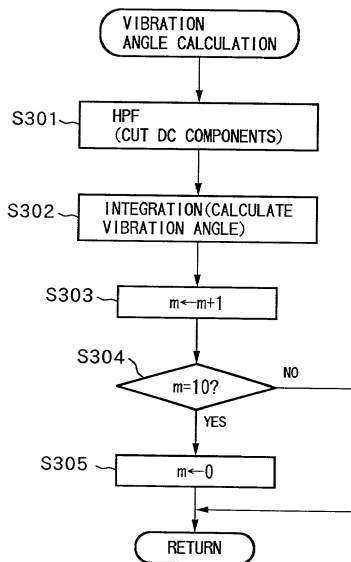


FIG.17

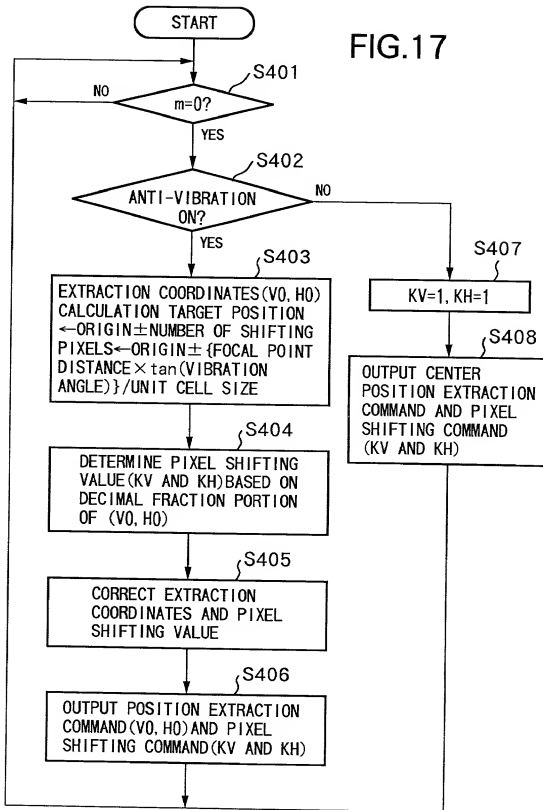


FIG. 18

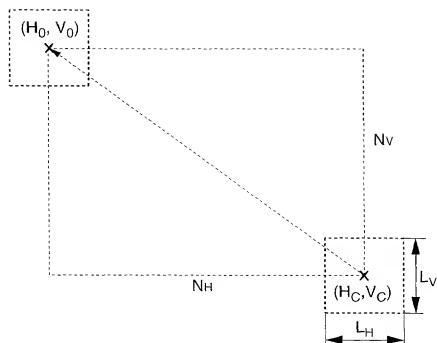


FIG. 19

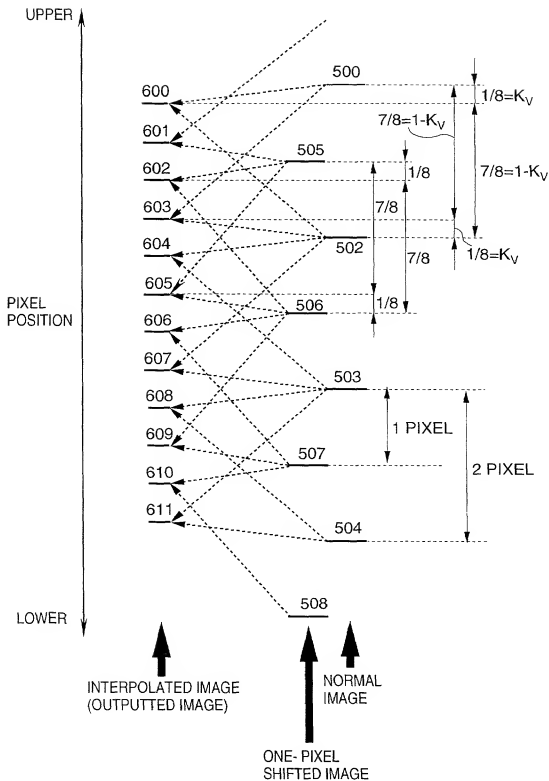


FIG.20


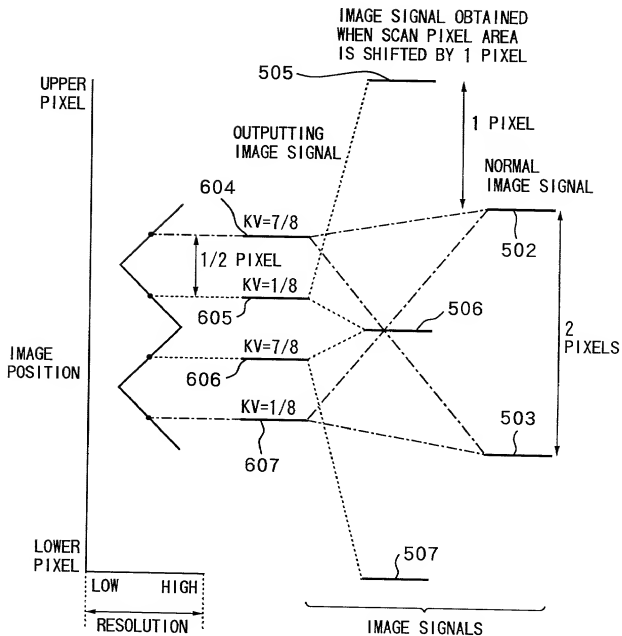


FIG. 21



X : POSITION INDICATED BY $\text{Int}(V_0) + \text{Dec}(V_0)$

FIG. 22

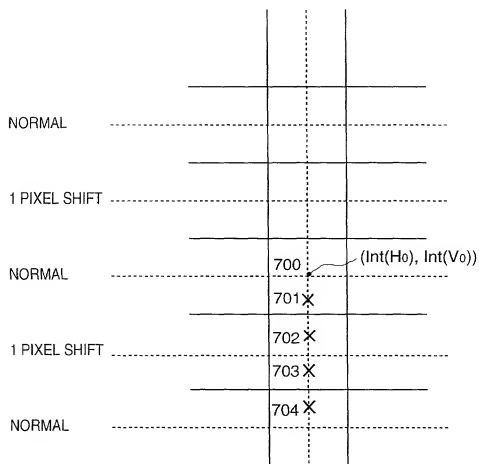